

# Exolon® multi UV 5X/16-25 ECOplus

## Multiwall polycarbonate sheet with bio-circular content



### Your benefits:

- sustainable share up to 89% of the content
- optimised area weight
- good load bearing
- high surface quality

**Exolon® multi UV 5X/16-25 ECOplus8** is a 5-wall polycarbonate sheet of 16 mm thickness, with an X-structure for enhanced stiffness which have an attributed sustainable share of up to 89% of the content. It combines high light transmission, good load bearing properties, good thermal insulation and excellent weather resistance. The sheet is lightweight, impact resistant and easy to install.

**Exolon® multi UV 5X/16-25 ECOplus8** is a partially bio-circular grade, attributed via mass balance according to ISCC PLUS Standard. The attributed sustainable share amounts up to 89% of the total content, a.o. by replacing the fossil based raw material in the product with renewable content.

**Exolon® multi UV 5X/16-25 ECOplus8** is ideal for flat glazing applications. It can also be installed as cold curved barrel vault.

- conservatories
- greenhouses
- covered walkways
- carports, porches,
- skylights, northlight glazing
- barrel vault

The sheets are produced with a coextruded UV-protective layer, which is homogeneously fused with the sheet material. This UV-protected side must be installed facing upwards/outwards. It provides **Exolon® multi UV** with a highly effective protection against weathering, guaranteed for 10 years.

On request:

### IQ-Relax

**Exolon® multi UV IQ-Relax** are opal white sheets, which dramatically reduce the heat of the sunlight, allowing the visible light to pass through. More light, less heat!

### Two side UV-protection

### ClimateControl


**Exolon® multi UV ClimateControl clear** is a transparent polycarbonate sheet that largely absorbs infrared light on both sides. This therefore significantly reduces heat transfer whilst simultaneously providing a high level of light transmission.

TECHNICAL DATA (TYPICAL VALUES)		
Area weight	2.4 kg/m <sup>2</sup>	
Sheet width	980, 1,200 and 2,100 mm	
Possible delivery lengths	2,000 to 13,000 mm	
Minimum permissible cold-bending radius <sup>(1)</sup>	2,400 mm	
Light transmittance $\tau_{D65}$ (UV-absorbing)	clear 1099: white 1146: IQ-Relax: CC clear 2070: bronze 1845:	ca. 64 % ca. 55 % ca. 47 % ca. 58 % ca. 27 %
Total energy transmission g	clear 1099: white 1146: IQ-Relax: CC clear 2070: bronze 1845:	ca. 61 % ca. 54 % ca. 45 % ca. 44 % ca. 45 %
Heat transfer coefficient U <sub>g</sub> <sup>(3)</sup>	2.0 W/m <sup>2</sup> K	
Coefficient of thermal expansion $\alpha$	0.065 mm/m °C	
Possible expansion due to heat and moisture	3 mm/m	
Max. service temperature without load	120°C	
Weighted sound reduction index	21 dB	
Fire rating <sup>(2)</sup>	B-s1, d0 (EN 13501-1)	
• Europe	all colours	

<sup>(1)</sup> The cold-bending must be parallel to the ribs of the sheets, never crosswise (risk of buckling). The sheets can be cold bent at a min. radius of 150 times of the sheet thickness. There may appear an optical distortion of the internal layers. This has no negative influence on the mechanical properties of the product providing our guidelines and installation tips are followed correctly.

<sup>(2)</sup> Fire certificates are limited in time and scope, always check if the mentioned certificate is valid for the purchased Polycarbonate sheet type at the date of delivery. Polycarbonate sheets may change their fire behavior due to ageing and weathering. The indicated fire rating was tested on new / unweathered Product in accordance with the indicated fire classification standards,

<sup>(3)</sup> Heat transfer coefficient U<sub>g</sub> according to EN ISO 10077-2 <sup>(3)</sup>

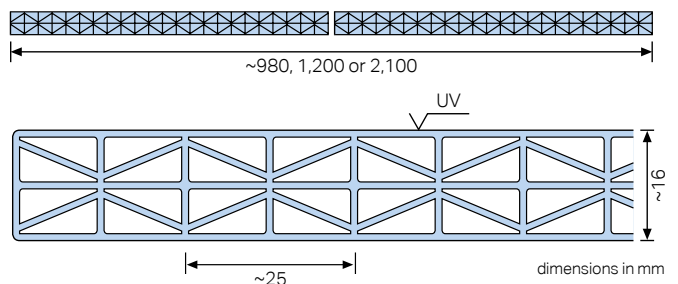

# Exolon® multi UV 5X/16-25 ECOplus

## Multiwall polycarbonate sheet with bio-circular content



Exolon Group ECORANGE represents a line of products which attribute to improved sustainability by having a lower ecological footprint.

When using **Exolon® multi UV 5X/16-25 ECOplus8** in roof or wall installations, the forces exerted by snow and wind loads must be absorbed by a suitable substructure. We recommend implementing the support distance indicated in the diagram for the respective loads.

The diagram shows the load-bearing capacity of **Exolon® multi UV 5X/16-25 ECOplus8** (supported on all sides, rebate depth  $\geq 20$  mm) with a standard profile on the longitudinal sides. The load-bearing curves enable the user to calculate the actual load-bearing characteristics of the multi-wall sheets in their support construction.

If the rebate depth is smaller, the support distances should be reduced in accordance with the relevant load. For wind forces alone, the loads are permitted to be multiplied by 1.1

### Load bearing characteristics (determination)\*:


The component resistance (limit state of load-bearing capacity) of **Exolon® multi UV 5X/16-25 ECOplus8** has been defined in accordance with the European guideline ETAG 010 regarding practical tests. The characteristic values identified were calculated on the longitudinal sides by considering the chocking effect (standard profiles). The results were partially applied to other widths using simplified, conservative models. The loads were applied as uniformly distributed linear loads, i.e. loads such as snow acting perpendicular to the sheet.

The values are reference values calculated by an independent and notified institute through tests on actual systems. Adequate safety margins must be observed in addition to these values. The margins are to be assessed on a case-by-case basis.

In general, experience has proven that a safety factor of 1.3 is adequate with regard to the measured resistance values. This safety factor is included in the load tables and diagram.


**These statements do not replace the specified national certificates, e.g. building inspectorate approval (Baufachliche Zulassung Germany), Avis Techniques (France), etc.**

\*Further information can be obtained on request

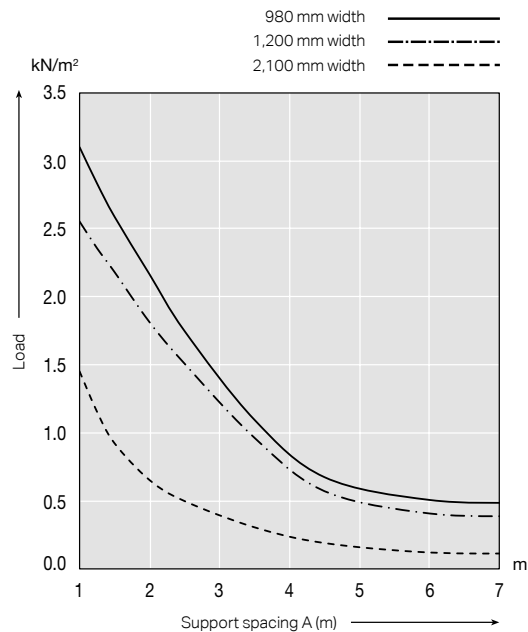

### Sustainability

The Exolon Group is committed to sustainability and protecting the environment, and actively supports and promotes developments which reduce the environmental impact of its products. **Exolon® multi UV ECOplus** is a partially bio-circular sheet with low carbon footprint. This means that the part of the material which is normally made from fossil raw materials is now made from renewable content. The attributed sustainable share amounts up to 89% of the total content. This is monitored via ISCC PLUS.



Load	kN/m²	0.75	1.0	1.25	1.5	2.0	Width in mm
Length or support spacing A	m	4.3	3.7	3.3	2.9	2.2	980
	m	4.0	3.4	3.0	2.5	1.7	1,200
	m	1.8	1.4	1.2	-	-	2,100

Exolon Group also produces solid sheets in polycarbonate (Exolon® GP) and in polyester (Vivak® and Axpet®). For more information, take a look at [www.exolongroup.com](http://www.exolongroup.com).



Exolon Group S.p.A  
Strada Di Vagno 15/A –  
05035 Nera Montoro (TR)

Italy

[www.exolongroup.com](http://www.exolongroup.com)  
[sales@exolongroup.com](mailto:sales@exolongroup.com)

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance, information and recommendations to determine to your own satisfaction whether our products, technical assistance and information are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by Exolon Group. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent.

Exolon® is a registered trademark of Exolon Group