

Makrolon® Silent Sound UV/AR

Solid polycarbonate sheet 18 mm



I Line
Innovative

Your benefits:

- Tested safety according to ZTV-LSW06/EN 14388
- Noise reduction DL_p : 34 dB
- 18 mm sheet thickness with extended UV protection
- Good fire rating

Solid **Makrolon® Silent Sound** sheets are clear, polished, UV-stabilized polycarbonate sheets and available as extended UV and Abrasion-resistant version. They offer extreme impact strength that exceeds the physical properties of other products of their class. Makrolon® sheets resist temperatures of -100 to +120 °C, exhibit high optical clarity and have a good fire rating.

Makrolon® Silent Sound sheets meet the sound technical requirements for noise reduction and the demands of road safety, stability such as form and ageing stability.

Makrolon® Silent Sound UV can be bent cold and also manufactured flat.

Applications:

Makrolon® Silent Sound can be used for noise protection barriers on motorways with heavy traffic, dual carriageways and railways.

The sheets offer protection against involuntary breakage and wilfull destruction. **Makrolon® Silent Sound** sheets can be thermoformed, cold-curved and machined with ease.

| | Test Conditions | Typical values ⁽¹⁾ | Unit | Standard |
|---|------------------------------|-------------------------------|---------------------|-----------------|
| PHYSICAL | | | | |
| Density | water at 23 °C | 1200 | kg/m ³ | ISO 1183-1 |
| Water absorption saturation | 23 °C, 50% relative humidity | 0.30 | % | ISO 62 |
| Water absorption equilibrium | Procedure A | 0.12 | % | ISO 62 |
| Refractive index | | 1.587 | – | ISO 489 |
| MECHANICAL | | | | |
| Tensile modulus | 1 mm/min | 2350 | MPa | ISO 527-1,-2 |
| Yield stress | 50 mm/min | > 60 | MPa | ISO 527-1,-2 |
| Yield strain | 50 mm/min | 6 | % | ISO 527-1,-2 |
| Nominal strain at break | 50 mm/min | > 50 | % | ISO 527-1,-2 |
| Flexural modulus | 2 mm/min | 2350 | MPa | ISO 178 |
| Flexural strength | 2 mm/min | 90 | MPa | ISO 178 |
| Charpy impact strength | 23 °C, unnotched | non-break | kJ/m ² | ISO 179-1eU |
| Charpy impact strength | 23 °C, 3 mm | 80P | kJ/m ² | ISO 179-1eA |
| Izod impact strength | 23 °C, 3.2 mm, notched | 90P | kJ/m ² | ISO 180-A |
| THERMAL | | | | |
| Vicat softening temperature | 50 N, 50°C/h | 148 | °C | ISO 306 |
| Thermal conductivity | 23°C | 0.20 | W/(m.K) | ISO 8302 |
| Coefficient of linear thermal expansion | 23 to 55°C | 0.65 | 10 ⁻⁴ /K | ISO 11359-1, -2 |
| Temperature of deflection under load | 1.80 Mpa | 128 | °C | ISO 75-1, -2 |
| Temperature of deflection under load | 0.45 Mpa | 140 | °C | ISO 75-1, -2 |
| ELECTRICAL | | | | |
| Electrical strength | 1 mm | 34 | kV/mm | IEC 60243-1 |
| Volume resistivity | | 1E14 | Ohm.m | IEC 60093 |
| Surface resistivity | | 1E16 | Ohm | IEC 60093 |
| Relative permittivity | 100 Hz | 3.1 | – | IEC 60250 |
| Relative permittivity | 1 MHz | 3.0 | – | IEC 60250 |
| Dissipation factor | 100 Hz | 5 | 10 ⁻⁴ | IEC 60250 |
| Dissipation factor | 1 MHz | 95 | 10 ⁻⁴ | IEC 60250 |


⁽¹⁾ These values are measured on injection molded samples, and are not intended for specification purposes.

Makrolon® Silent Sound UV/AR

Solid polycarbonate sheet 18 mm



Ideas, innovative, intelligent, interesting... Exolon Group i-line represents the next generation of quality products. This seal guarantees innovative and intelligent first-class solutions at all times for a multitude of requirements.

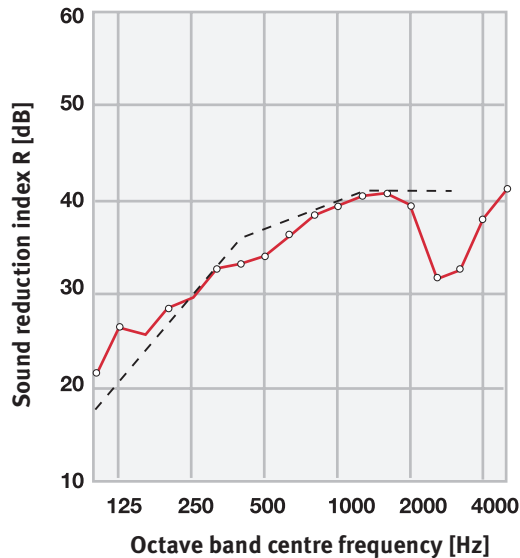

RESULTS dB [EN ISO 140-3]

| | |
|-------------------------------|------|
| Sum of deviation | 26.8 |
| Average deviation | 1.79 |
| Displacement designated curve | -15 |
| Sound reduction index R_w | 37 |

SPECTRUM ADAPTATION TERMS

| | C | C_{tr} |
|-----------------------------------|----|----------|
| 100 - 3,150 Hz | -2 | -3 |
| 100 - 5,000 Hz | -1 | -3 |
| 50 - 3,150 Hz | -2 | -4 |
| 50 - 5,000 Hz | -1 | -4 |
| $\Delta L_{A,R,Str}$ (ZTV-LSW 88) | | 34 |
| DL _R (DIN EN 1793-2) | | 34 (B3) |

EUROPEAN CERTIFICATES for Makrolon® Silent Sound UV

Resistance to brushwood fire according to ^(*):

DIN EN 1794-2, Annex A: Class 2
ZTV-LSW 06, Section 2.5.4

Impact of Stones according to:

DIN EN 1794-1, Annex C: Passed

Danger of falling debris according to:

DIN EN 1794-2, Annex B: Class 6

(*) Fire certificates are limited in time and scope, always check if the mentioned certificate is valid for the purchased Polycarbonate sheet type at the date of delivery. Polycarbonate sheets may change their fire behavior due to ageing and weathering. The indicated fire rating was tested on new / unweathered Product in accordance with the indicated fire classification standards.

exolon
GROUP

Exolon Group GmbH
Rommerskirchener Str. 21
50259 Pulheim
Germany

www.exolongroup.com
sales@exolongroup.com

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance, information and recommendations to determine to your own satisfaction whether our products, technical assistance and information are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by Exolon Group. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent.

Makrolon® is a registered trademark, owned and licensed by Covestro Group